

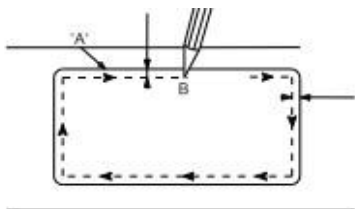


INSTALLATION INSTRUCTIONS-TOP MOUNTED SINKS



1. Use the cut-out template provided to make the cut-out line on the bench top.

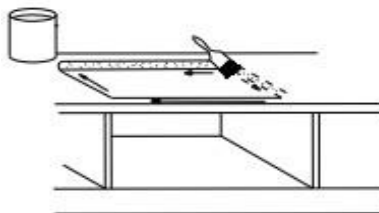

2. Cut the bench top along the line you marked. Seal the cut surfaces.

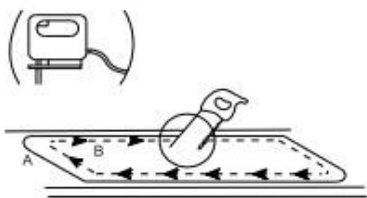

3. Fit gasket to back of the sink ensuring double thickness at the corners. Push clips onto the rail.

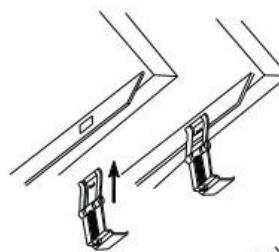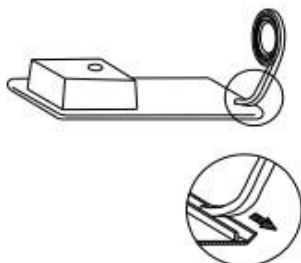

4. Rotate claw under the bench top. Use Philip head screwdriver to tighten all clips in the order shown below.

