

Vertical Heated Towel Rail



Models Available --CONCEALED WIRING

TP900CH

TP900BK

TP900GM

TP900BN

TP900BB

(can be installed horizontally or vertically)

OPERATING INSTRUCTIONS

SAFETY INFORMATION

When using any electrical appliance ,basic safety precautions should always be observed .

READ THESE INSTRUCTIONS CAREFULLY .

Keep them in handy for future reference .

□ This appliance is intended to warm and dry towels and therefore is hot to the touch .

When used by or near young children or infirm persons ,close supervision is necessary .Young children should be supervised to ensure that they do not play with the appliance .

□ Any rise in ambient temperature is directly reflected in the appliance,and as a result of this ,the appliance will feel hotter to the touch during warmer periods.Also the insulation effect of towels will cause the operation temperature to increase slightly .

□ The appliance is to be installed so that switches and other controls cannot be touched by a person in the bath or shower .

□ DO NOT use this appliance for any purpose other than its intended use .

□ To avoid a hazard this heated towel rail MUST NOT be used to carry towels or any other articles that have been in contact with oil,petroleum based products or dry cleaning fluids .

□ Use this appliance only with the voltage specified on the rating label,or elsewhere in these instructions.

□ Regulations require that electrical work be carried out only by authorised persons .For your own safety and that of others ensure this is done .

□ DO NOT immerse in any liquid .

□ For service contact your nearest Authorised Service Agent .

□ **WARNING** :In order to avoid a hazard for young children ,this appliance must be installed so that the bottom rail is at least 600mm above the floor .

SPECIFICATIONS

| DIMENSIONS | | | | | |
|---------------------------------------|-----------------------|-------------|-----------|----------------|---------------|
| Model | TP900CH | TP900BK | TP900GM | TP900BN | TP900BB |
| Height(mm) | 900 | 900 | 900 | 900 | 900 |
| Width (mm) | 38 | 38 | 38 | 38 | 38 |
| Depth (mm) | 100 | 100 | 100 | 100 | 100 |
| | | | | | |
| Wattage(W) | 24 | 27 | 24 | 24 | 24 |
| Colour | Polished | Matte Black | Gun Metal | Brushed Nickel | Brushed Brass |
| Supply | 230~240 Volts 50Hz | | | | |
| International Protection Rating :IP55 | | | | | |

INSTALLATION

Mounting towel rail :

Please note: This towel warmer must be installed by a registered electrician and in accordance with local and national electrical codes.


Please read the safety information on the previous page carefully before mounting .

For example :

1, First, open the package ,check the towel rail and the mounting accessories.



2, Fix the hook to the vertical bar. (the hook is optional and is not necessary for the unit to operate.) Slide the hook on the top of the vertical bar (ensuring that the small screw hole is facing towards the wall)and hold in desired position. Use the small Allen key to fix it.



3, Confirm your concealed power wires before you install the fixing base to the wall


4, Mark the centre distance for your model .And it is important that the line between these two points is level.




| Model | TP900CH | TP900BK | TP900GM | TP900BN | TP900BB |
|-------------------------|---------|---------|---------|---------|---------|
| Horizontal Distance(mm) | 780 | 780 | 780 | 780 | 780 |

5, Top Leg Installation

For Leg on the top of the towel rail, take off the fixing base from the leg set by the Allen key, install the leg by the screw shown as picture 2 on the towel rail



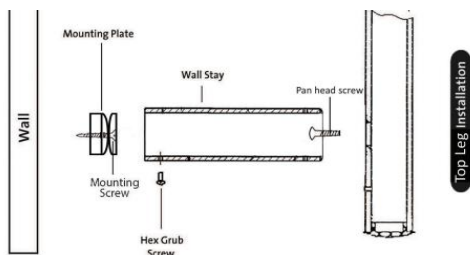


6, Concealed Wiring Installation

Take off the two screws from the towel rail and take off the grub screw from the leg(see pic 2),put the white cable pass through the leg.



Measure and mark out the bracket positions making sure they are level. Drill a 6mm holes for the bracket and an extra hole for cable at the wiring point and insert suitable wall plugs.

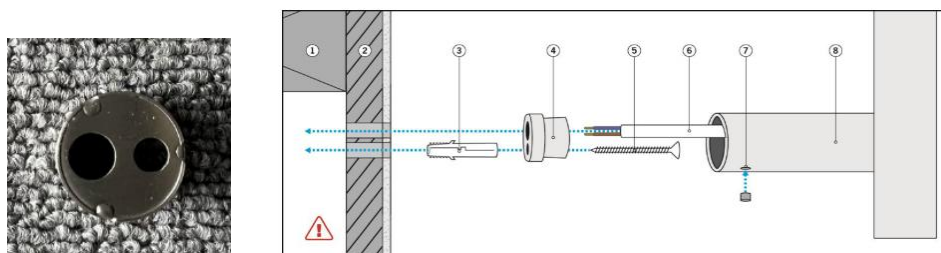

Bracket (two holes)

ELECTRICAL INSTALLTION

This appliance **MUST** be installed in accordance with the relevant wiring rules and regulations and in particular those regulations which cover installation of appliances and accessories in damp situations such as bathrooms ,shower,laundries and other areas with fixed water containers .It is to be fitted in accordance with applicable .

Australian /New Zealand Standard (AS/NZS).

The means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules .Special purpose tools are required for the replacement of the power supply cord and element .Contact an Authorised Service Agent for service.

CARE AND CLEANING

The Stainless Steel Finish of Your Heated Towel Rail is hard wearing and easy to maintain. However, any harsh scrubbing, scratching or acid based cleaning products will damage the surface of your towel rail. Cleaning with a soft cloth and a non-abrasive cleaning agent will give the best results.

DO NOT USE ANY ABRASIVE OR CORROSIVE CLEANERS